

HTB VRLA Battery



HTB12-170 12V170Ah

HTB VRLA battery uses latest AGM technology designed for high temperature resistant performance with good cycle life and fast charging acceptance ability. Its average temperature can be 35-40 C. HTB's reduced needs for cooling saves energy and reduces cost. It is suitable for high temperature environments both in floating and cyclic applications. Sacred Sun has two ranges: 12V front terminal and 2V top terminal.



Benefits

- Long life according to EUROBAT Classification
- Specifically designed for semi-stable mains
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling
- Centralized venting system


Applications

- High temperature BTS
- Unstable grid BTS
- Remote area BTS
- Solar (Wind) energy storage system

Standards

- JIS C8704-1
- JIS C8704-2
- IEC 60896-21/22
- IEC 61427
- EUROBAT guide
- Installation compliant with EN50272-2

Drawing

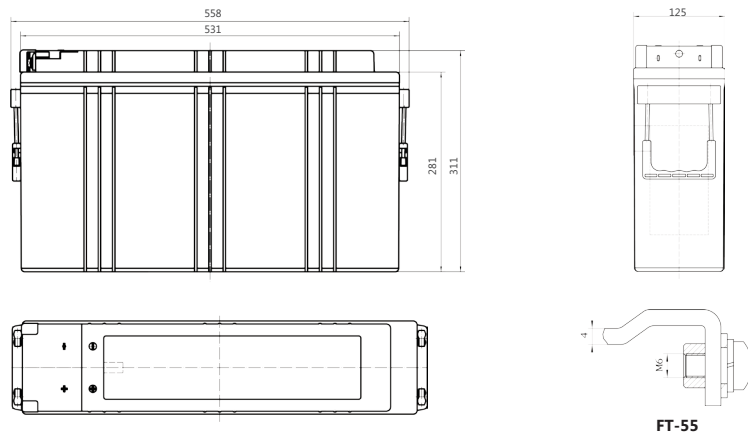

Specifications


Battery Model	HTB12-170			
Design Life (Years, 35°C)	10			
Capacity (Ah, 25°C)	10HR (17A, 1.80V)	5HR (29.8A, 1.80V)	3HR (43.9A, 1.80V)	1HR (96.1A, 1.75V)
	170	149	131.7	96.1
Dimensions (mm)	Length	Width	Height	Total Height
	558	125	311	311
Approx. Weight (kg)	54.7			
Reference Internal Resistance (mΩ)	3.4 (fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	1350			
Self-Discharge (25°C)	≤ 1.5% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current: 30A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	3500			

Discharge Data


Constant Current Discharge Data (25°C, A)										
End Voltage (V/cell)	min	h								
	30	1	2	3	4	5	6	8	10	20
1.60	182	102	63.2	47.4	38.6	32.3	27.9	21.9	18.4	9.64
1.65	179	99.6	61.9	46.6	37.9	31.6	27.4	21.6	18.0	9.45
1.70	175	98.1	60.7	45.7	37.2	30.9	26.9	21.3	17.7	9.27
1.75	170	96.1	59.5	44.7	36.4	30.4	26.4	20.7	17.3	9.10
1.80	168	93.3	58.3	43.9	35.7	29.8	25.8	20.4	17.0	8.93

Constant Power Discharge Data (25°C, W/cell)										
End Voltage (V/cell)	min	h								
	30	1	2	3	4	5	6	8	10	20
1.60	336	192	120	91.1	74.3	62.5	54.1	42.5	36.0	19.0
1.65	334	189	118	89.8	73.2	61.7	53.4	42.2	35.5	18.7
1.70	330	187	117	88.4	72.2	60.3	52.7	41.7	35.0	18.4
1.75	323	184	115	86.9	71.3	59.6	51.9	40.8	34.5	18.2
1.80	322	180	113	85.7	69.8	58.6	51.2	40.6	34.0	17.9


Performance Curve

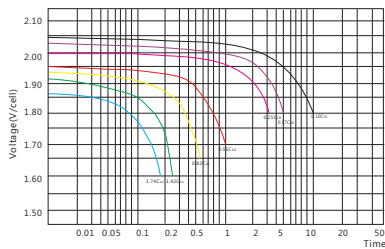


Discharge Performance

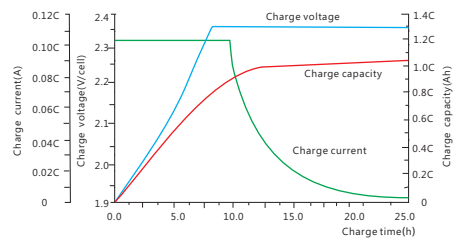

Charge Performance

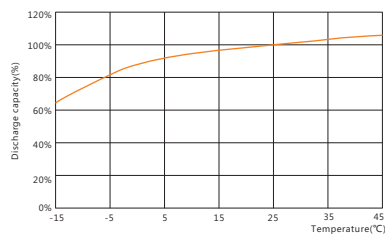

Temperature vs. capacity

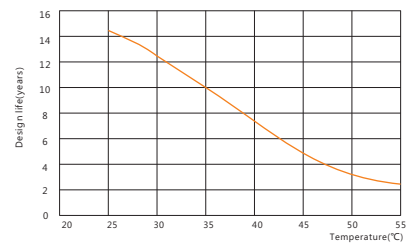

Design life vs. temperature

