

HTB VRLA Battery



HTB2V-200 2V200Ah

HTB VRLA battery uses latest AGM technology designed for high temperature resistant performance with good cycle life and fast charging acceptance ability. Its average temperature can be 35-40 C. HTB's reduced needs for cooling saves energy and reduces cost. It is suitable for high temperature environments both in floating and cyclic applications.




Benefits

- Long life according to EUROBAT Classification
- Specifically designed for semi-stable mains
- High discharge performance
- 99%+ gas recombination efficiency
- Maximum charge efficiency
- Low self-discharge rate
- Easy installation and handling

Applications

- High temperature BTS
- Unstable grid BTS
- Remote area BTS
- Solar (Wind) energy storage system

Drawing

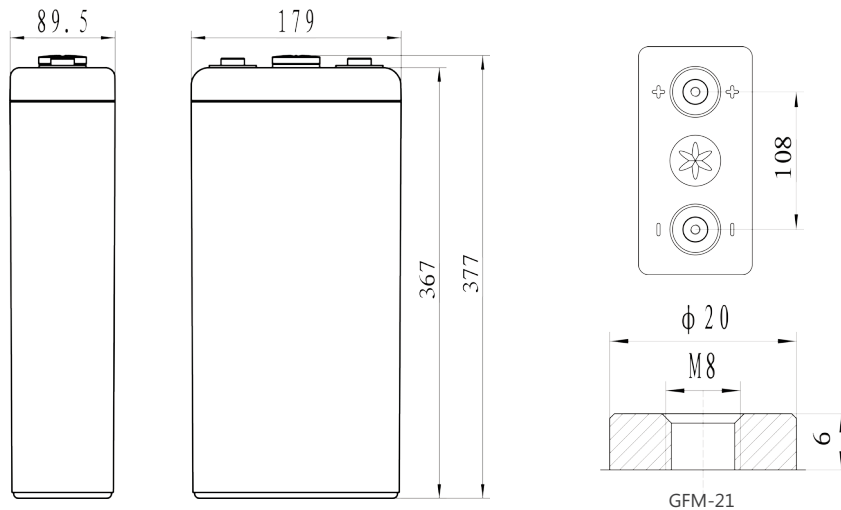

Standards

- JIS C8704-1
- JIS C8704-2
- IEC 60896-21/22
- IEC 61427
- EUROBAT guide

Specifications

Battery Model	HTB2V-200			
Design Life (years, 35°C)	10			
Capacity (Ah, 35°C)	10HR (20.3A, 1.80V)	5HR (35.3A, 1.80V)	3HR (51.6A, 1.80V)	1HR (111A, 1.75V)
	203	176.5	154.8	111
Dimensions (mm)	Length	Width	Height	Total Height
	89.5	179	367	377
Approx. Weight (kg)	14.0			
Reference Internal Resistance (mΩ)	0.53 (fully charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	1100			
Self-Discharge (25°C)	≤ 1.0 % per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.35 (-3.5mV/°C/cell), max charge current: 40A		2.25 (-3.5mV/°C/cell)	
Short Circuit Current (A)	3000			

Discharge Data

Constant Current Discharge Data (35°C, A)												
End Voltage (V/cell)	min	h										
	30	1	2	3	4	5	6	8	10	24	48	100
1.75	161	111	70	52.3	44.1	35.7	30.9	24.6	20.5	9.1	5.1	2.8
1.80	155	109	69	51.6	43.5	35.3	30.5	24.4	20.3	9.0	4.9	2.7
1.85	148	100	67	50.9	42.8	34.9	29.9	23.9	19.7	8.9	4.7	2.7
1.88	130	87	67	44.7	39.1	33.5	31.6	22.7	18.7	8.5	4.4	2.5
1.90	113	81	62	42.6	37.9	33.1	31.4	22.3	18.3	8.1	4.3	2.4

Constant Power Discharge Data (35°C, W/cell)												
End Voltage (V/cell)	min	h										
	30	1	2	3	4	5	6	8	10	24	48	100
1.75	272	191	126	95	75.3	65.6	58.2	48.0	40.0	19.6	9.5	4.9
1.80	255	185	122	93	79.3	64.9	57.5	47.3	39.5	19.4	9.2	4.8
1.85	240	167	108	85	65.7	60.9	56.1	43.3	36.7	18.5	8.6	4.6
1.88	213	153	99	81	62.3	56.8	54.8	42.6	35.7	18.1	8.3	4.5
1.90	185	131	91	67	59.5	53.3	53.5	41.3	34.1	17.4	7.8	4.3

Performance Curve

